

30W N TYPE TERMINATION LOAD (DC-6G)



Tone Spread
Solutions for Wireless Signal


Telecommunication Technology & Engineering Accessories

Rev.V1.0


Specification of 20W~30W , NType Termination Load (DC-6GHz):

Item	Specification	
Model	TE-30W-6GN/M	TE-30W-6GN/F
Power (Average)	20W~30W	
Power (Peak)	1.5KW	
Frequency Range	DC-6G	
VSWR	≤1.20	
Impedance	50 Ω	
Connector Type	N/Male	N/Female
Inner Contact Plating	Silver Plate	
Outer Contact Plating	Trimetal	
Body Color	Black	
Radiator	Aluminum	
Temperature	-35°C ~ +80°C	
Annotation	IP65 , Indoor/Outdoor Use , RoHS Compliant	
Product Drawing	The Following Figure	

Product Drawing:

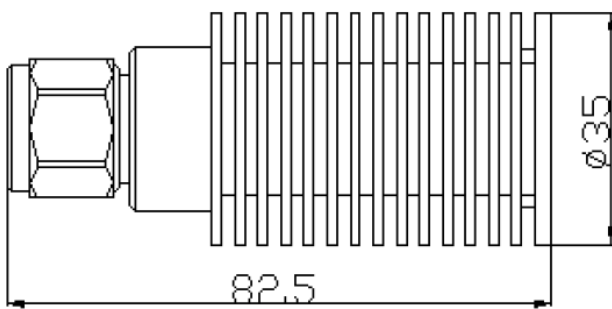

TE-30W-6GNM (Round type)

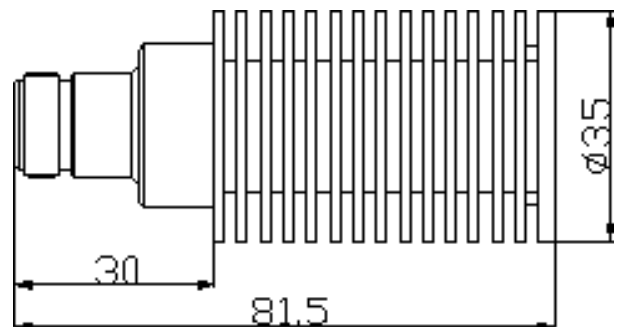

TE-30W-6GNF (Round type)

Note: The picture and the specification are just for reference. Be subject to the actual products if anything updated in future, Please pardon for without notice.

