

698-3800MHz 300W POWER SPLITTER



Tone Spread
Solutions for Wireless Signal


Communications Technology & Engineering Accessories

Rev.V1.2

Specifications of N Type High Power Air-line Dielectric Power Splitter (698-3800MHz):

Item	Specification		
Model	PS-738-300-2CNG	PS-738-300-3CNG	PS-738-300-4CNG
Frequency Range	698-3800MHz (698-4000MHz)		
Split	2	3	4
VSWR	1.30	1.30	1.30
Insertion loss	≤ 3.3 dB	≤ 5.3 dB	≤ 6.5 dB
Intermodulation	$\leq -150\text{dBc}@2\text{X}43\text{dBm}$		
Power Rating	300 W		
Impedance	50 Ω		
Connector	N/Female		
Temperature Range	$-35 \sim +75$ $^{\circ}\text{C}$		
Applications	Indoor/Outdoor, IP65		

Product Drawing:

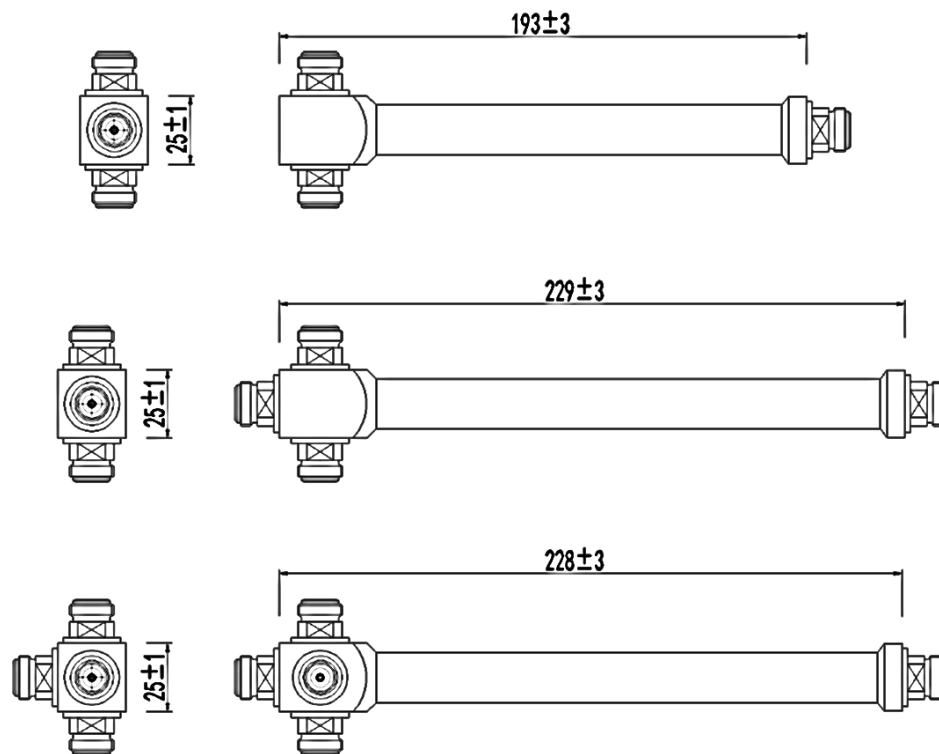

All specifications are subject to change without notice.

©2021 Tone Spread Technology Co., Ltd. All Rights Reserved.

Website <http://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw