

340-3800MHz 4 WAY POWER SPLITTER

JTD-4CPS-3438-160-NF



JIETONG DIGITAL

BEST CONNECTED

Telecommunication Technology & Engineering Accessories

Rev.V1.0

Power Splitter (340-3800MHz, -160dBc, N Female, IP65)

Features & Benefits


- Guaranteed PIM Compliance
- Wide Frequency Band Covering 340-3800MHz
- Low Insertion Loss
- Low VSWR
- Indoor/Outdoor Using IP65
- Available with Type N, 7/16DIN or 4.3/10 Connectors



Electrical & Mechanical Specifications

Model No.	JTD-4CPS-3438-160-NF
Freq(MHz)	340-3800MHz
Split Chanel	4 Way
Split Loss(dB)	6.0
Insertion Loss(dB)	$\leq 0.7(340-2700)$; $\leq 0.6(2700-3800)$
VSWR	$\leq 1.40(340-2700)$; $\leq 1.30(2700-3800)$
PIM Rating(dBc)	-160dBc@2x43dBm
Power Rating(W)	300W (average Per Port)
Impedance	50 ohm
Connector	N Female
Color	Black
Operating	-30~+65
Weight(kg)	0.65

Product Drawing:

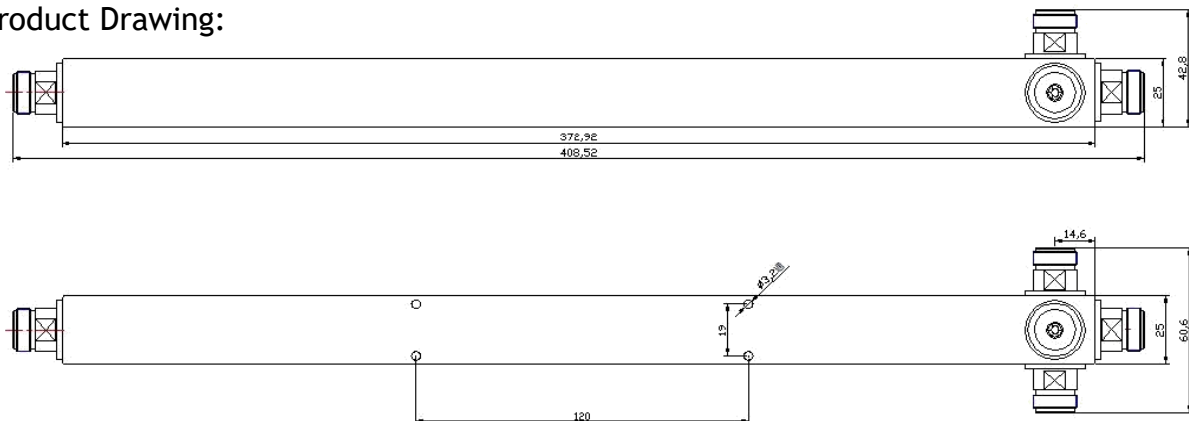

Note: The picture is only for reference; please make the object as the standard



All specifications are subject to change without notice.

©2022 Jietong Digital Technology Ltd. All Rights Reserved.

Website <http://www.jtd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@jtd.com.tw