

# 50W LOW PIM TERMINATION LOAD(600-4G)



**JIETONG DIGITAL**

*GET CONNECTED*


Telecommunication Technology & Engineering Accessories

Rev.V1.0

## Specification of 50W, N Type Low PIM Termination Load:

Item	Specification	
Model	JTD-LPTE-50W-4GNMS/R	JTD-LPTE-50W-4GNFS/R
Power	50W	
Frequency Range	600-4000MHz	
VSWR	≤1.25	
Impedance	50 Ω	
Intermodulation	-160dBc@2X43dBm / -165dBc@2X43dBm (Typical)	
Connector Type	N/Male	N/Female
Body Color	Black	
Radiator	Aluminum	
Temperature	-35℃ - +50℃	
Annotation	Indoor Use, IP65	

## Product Drawing:

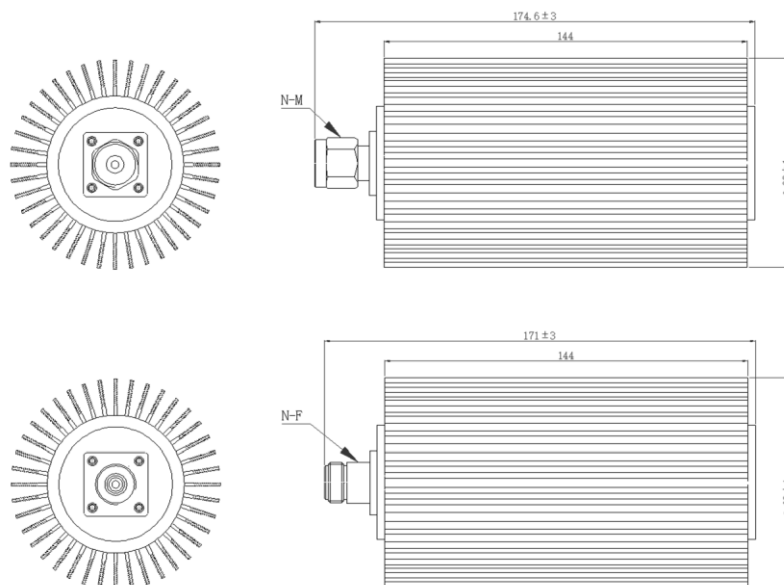

Note: The picture and the specification are just for reference. Be subject to the actual products if anything different or updated, Please pardon for without notice.

