

100W LOW PIM TERMINATION LOAD



Tone Spread
Solutions for Wireless Signal


350-4000MHz

LPDL-100W-4GNM(F)S/R

Specification of 100W, N Type Low PIM Termination Load:

Item	Specification	
Model	LPDL-100W-4GNMS/R	LPDL-100W-4GNFS/R
Power	100W	
Frequency Range	350-4000MHz	
VSWR	≤ 1.30	
Impedance	50 Ω	
Intermodulation	-155dBc@2X+3dBm / -160dBc@2X+3dBm (Typical)	
Connector Type	N/Male	N/Female
Body Color	Black	
Radiator	Aluminum	
Temperature	-35°C - +50°C	
Annotation	Indoor Use,IP65	

Product Drawing:

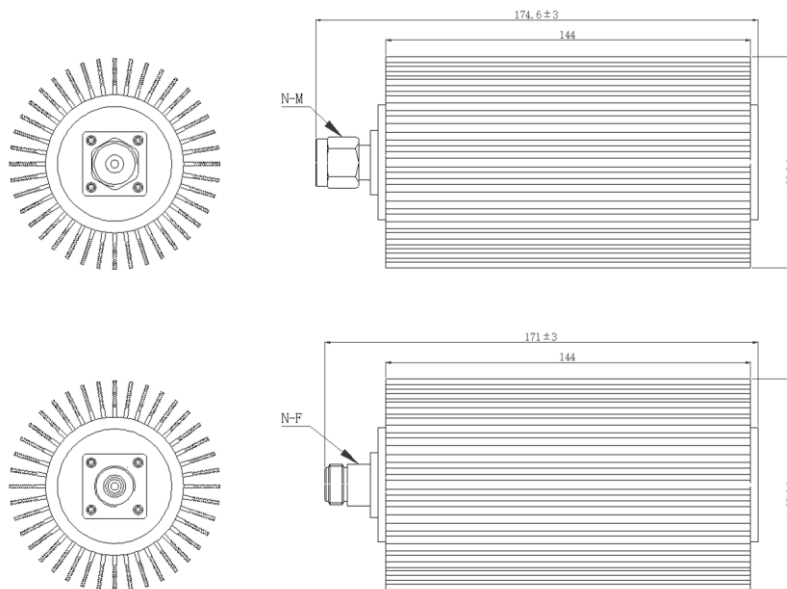

Note: The drawing only for reference, please don't make the object as the standard.

