

136-174MHz(N-F)

2 Way Power Splitter

PSC-174-2NF

Tone Spread
Solutions for Wireless Signal


Telecommunication Technology & Engineering Accessories

Rev.V1.0

Technical & Mechanical Specifications

Frequency Range(MHz)	136-174
Type	2 – Way
Insertion Loss (dB)	≤3.3 dB
In-Band Ripple(dB)	≤0.3 dB
VSWR	≤1.3
Power(W)	300W AVG
Impedance(Ω)	50
Environmental Specifications	
Operating Temperature($^{\circ}$ C)	-20 $^{\circ}$ C to +55 $^{\circ}$ C
Relative humidity	≤95%
Applications	Indoor IP55
Mechanical Data	
RF Connector	N-F
Dimension(mm)	350×25×25mm
Colour	Black or Custom

Product Drawing:

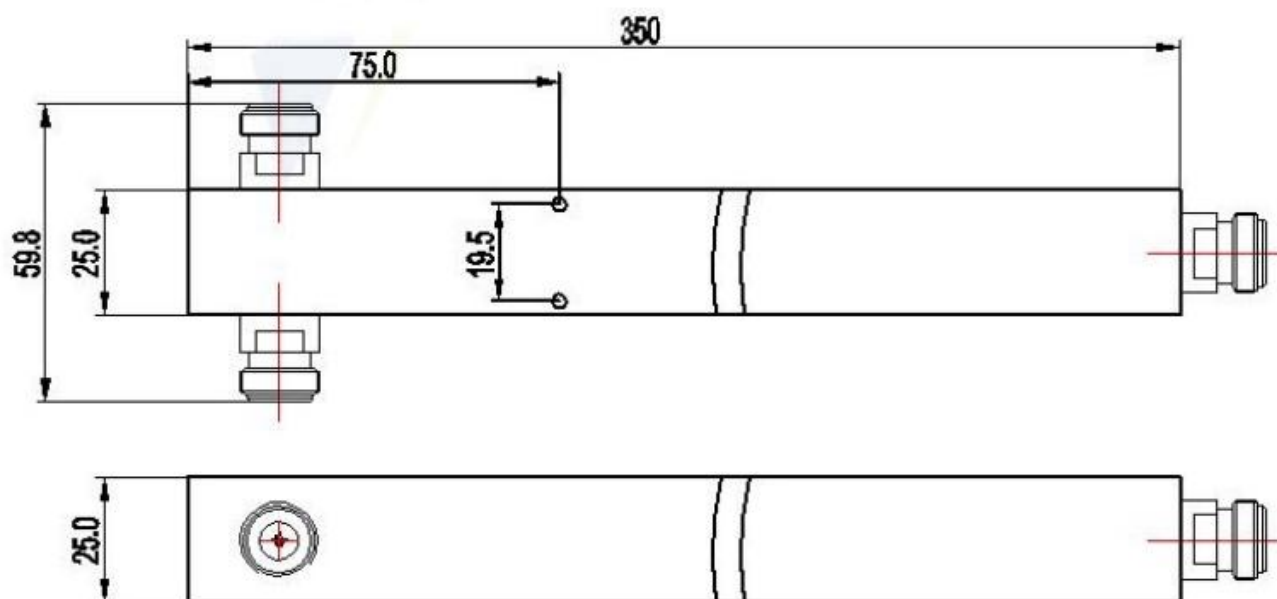

Note: The picture is only for reference, please make the object as the standard

All specifications are subject to change without notice.

©2021 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <https://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw