

RG213 Jumper Cable

1. Specification of RG213 Jumper (N/M-N/M):

Name of Connector Part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Nickel plated	2~3μ
Connecting nut	Brass (HPb59-1)	Nickel plated	2~3μ
Inner conductor	Bronze(QSn6.5-0.1)	Gold Plating	2~3μ
Clamp	Brass (HPb59-1)	Nickel plated	2~3μ
Insulator	PTEF (SFX-1)		
Sealing	Silicone rubber		


4. Working environment: Working temperature: -40~+85°

Relative moisture : 90%~95% (Temperature: 40±2℃)

Atmospheric pressure: (70~106)KPa

5. Product Drawing:

N Male to N Male

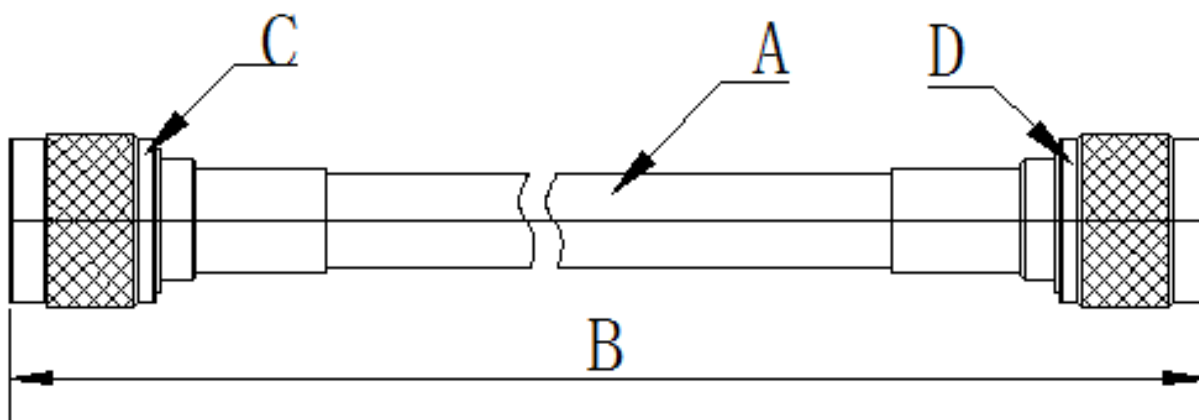

6. Mechanical characteristics:

Item	Spec
Impedance(Ω)	50
Insulation resistance (MΩ)	≥5000
Withstanding voltage AC(V/min)	2000
VSWR(0~2GHz)	≤1.10
Waterproof	IP68
Durability	500 Cycles

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.