

超寬帶雙工器濾波器

Ultra-Wideband Diplexer



Tone Spread
Solutions for Wireless Signal

136-2500MHz(N-F)

TS-DP-1325-50NF


Telecommunication Technology & Engineering Accessories

Rev.V1.0

規格(Technical & Mechanical Specifications)

Frequency Range(MHz)	136-2500	
Item	Low Band	High Band
Pass Band Frequency Range(MHz)	136~174	700~2500
Pass Band Insertion Loss (dB)	≤0.3	≤0.3
Pass Band Return Loss	≥20	≥17
Isolation	≥50	≥50
Power(W)	50	
Impedance(Ω)	50	
Environmental Specifications		
Operating Temperature(°C)	-10° C to +50° C	
Size(mm) ±10%	60×60×30	
Relative humidity	≤95%	
Applications	Indoor IP55	
Mechanical Data		
RF Connector	N-F	
Colour	Black or Custom	

Product Drawing:

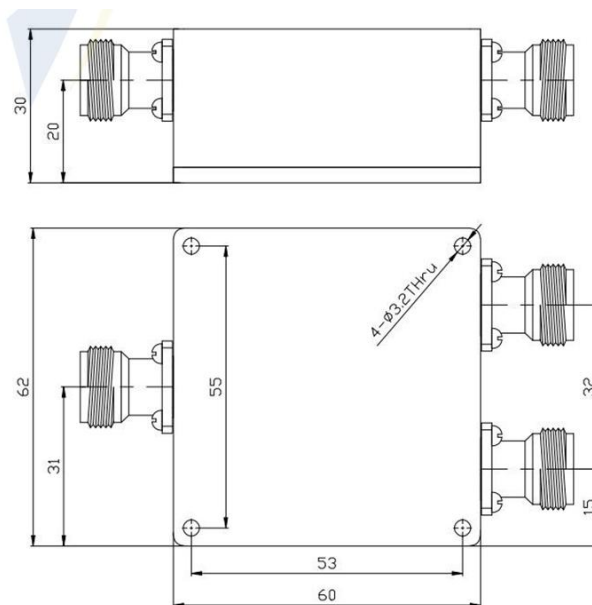

Note: The picture is only for reference, please make the object as the standard

All specifications are subject to change without notice.

©2021 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <http://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw