

超寬帶混合式合路器

Ultra-Wideband Hybrid Combiner



Tone Spread
Solutions for Wireless Signal

136-2500MHz(N-F)

TS-HC-1325-100NF


Telecommunication Technology & Engineering Accessories

Rev.V1.0

規格(Technical & Mechanical Specifications)

Frequency Range(MHz)	136-2500
Insertion Loss (dB)	≤3.1±2
Isolation(dB)	≥15
VSWR	≤1.5
PIM (dBc)	≤130
Power(W)	100W
Impedance(Ω)	50
Environmental Specifications	
Operating Temperature(°C)	-20° C to +50° C
Size(mm) ±10%	500×40×25
Relative humidity	≤95%
Applications	Indoor IP55
Mechanical Data	
RF Connector	N-F
Colour	Gray or Custom

Product Drawing:

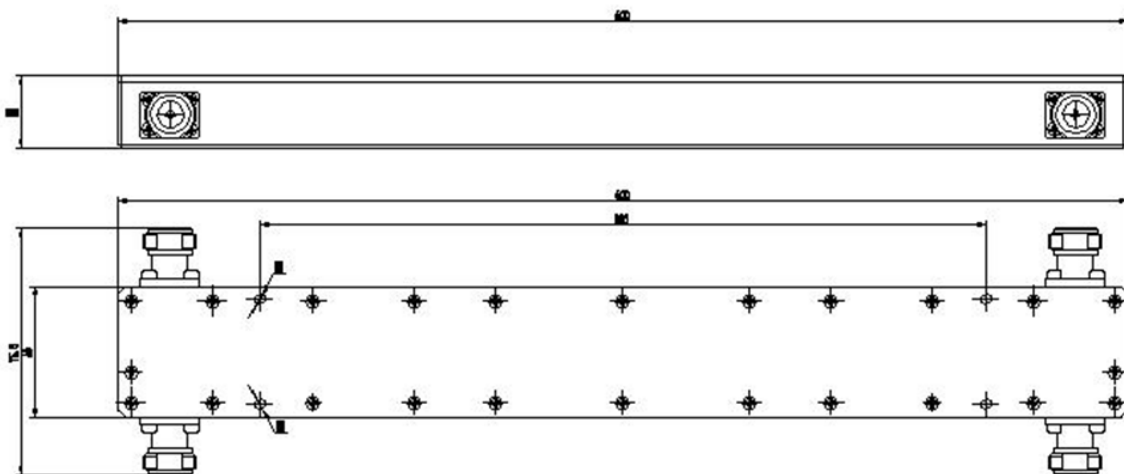

Note: The picture is only for reference, please make the object as the standard