

# I34~I74MHz 2\_3\_4 Ways Power Splitter(MS)

## TS-PS-13.I7-50-2\_3\_4MNI



Tone Spread  
Solutions for Wireless Signal


Telecommunication Technology & Engineering Accessories

Rev.V1.0

Specifications of N Type Micro-Strip 2\_3\_4 Ways Power Splitter (I34-I74 MHz):

Item	Specification		
Model	TS-PS-13.I7-50-2MNB	TS-PS-13.I7-50-3MNB	TS-PS-13.I7-50-4MNB
Frequency Range	I34~I74MHz		
Split	2 dB	3 dB	4 dB
Split Loss	3 dB	4.8 dB	6 dB
Insertion loss	0.7 dB	1.0 dB	1.2 dB
VSWR	1.30	1.35	1.35
Power Rating	50 W		
Isolation	≥18		
Impedance	50 Ω		
Connector	N/Female		
Temperature Range	-35 ~ 80°C		
Applications	Indoor Use,IP65		
RoHS	Compliant		

### Product Drawing:

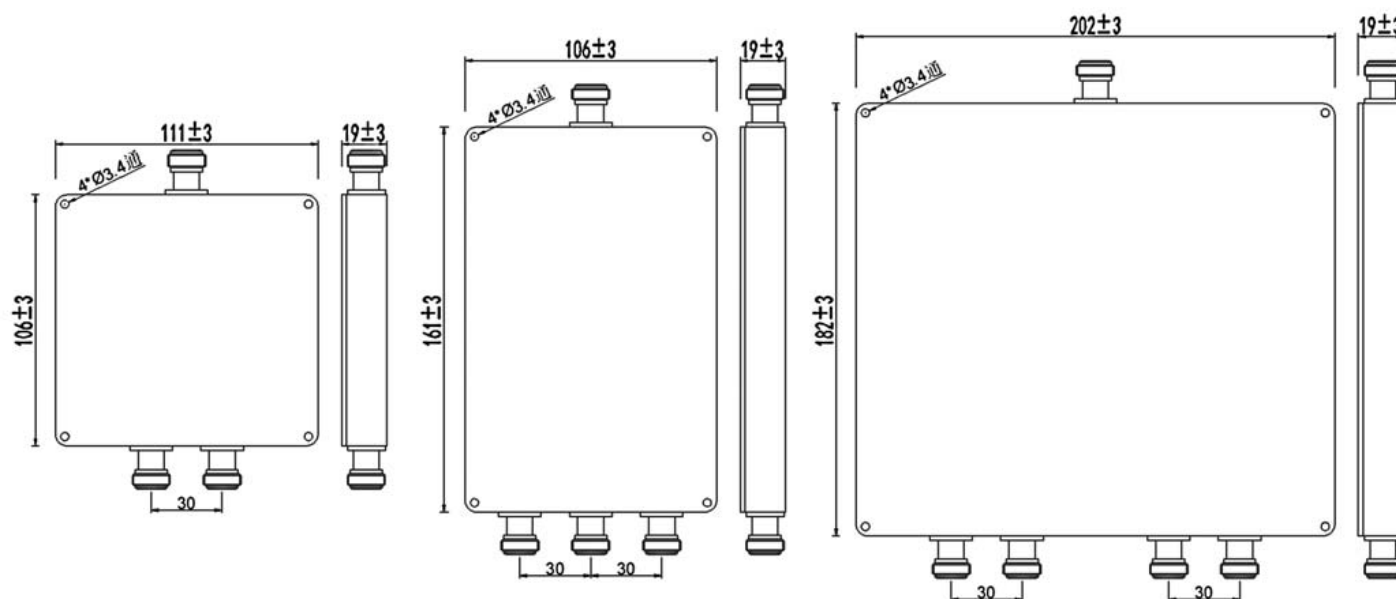

Note: The drawing only for reference, please make the object as the standard.



All specifications are subject to change without notice.

©2021 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <https://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw