

微帶二功分器

Micro Strip 2 Way Power Splitter

225-400MHz(N-F)

TS-PS-240-02-NF-50



Tone Spread
Solutions for Wireless Signal

Telecommunication Technology & Engineering Accessories


Rev.V1.0

- ◆ 寬頻帶(Wide Frequency Band) 225-400MHz
- ◆ 高端口間隔離(High Port to Port Isolation)
- ◆ 低駐波比和插入損耗(Low VSWR & Insertion Loss)
- ◆ 應用室內和室外IP65(Application Indoor & Outdoor IP65)



規格(Technical & Mechanical Specifications)

Frequency Range(MHz)	225-400
Type	2 – Way
Insertion Loss (dB)	≤0.3 dB
Split Loss(dB)	3.0
VSWR	≤1.3
Port Isolation(dB)	≥20
Average Power(W)	200W
Impedance(Ω)	50
Environmental Specifications	
Operating Temperature(°C)	-35° C to +65° C
Size(mm) ±10%	108×92×24
Relative humidity	5%-95%
Applications	Indoor & Outdoor IP65
Mechanical Data	
RF Connector	N-F
Colour	Red

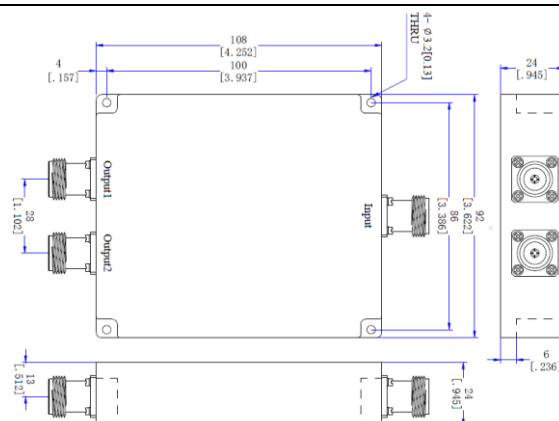

All specifications are subject to change without notice.

©2021 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <http://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw