

2_3_4 Way Power Splitter



Tone Spread
Solutions for Wireless Signal

TS-PS-30.96-100-xMNI


Telecommunication Technology & Engineering Accessories

Rev.V1.0

Specifications of N Type Micro-Strip 2_3_4 Way Power Splitter (300-960MHz):

| Item | 2 Way | 3 Way | 4 Way |
|--------------------------|--------------------------------------|----------------------|----------------------|
| Model | TS-PS-30.96-100-2MNI | TS-PS-30.96-100-3MNI | TS-PS-30.96-100-4MNI |
| Frequency (MHz) | 300~960 | | |
| Split Loss (dB) | 3 | 4.8 | 6 |
| Insertion Loss (dB) | 0.3 | 0.5 | 0.7 |
| Isolation (dB) | ≥20 | | |
| Intermodulation (dBc) | -130@2x43dBm | | |
| V.S.W.R | ≤1.25 | ≤1.25 | ≤1.35 |
| Power (W) | 100 | | |
| Interface | N/Female | | |
| Impedance (Ω) | 50 | | |
| Temperature (°C) | -25~+85°C | | |
| Environment Applications | Indoor/Outdoor, IP65, RoHS Compliant | | |
| Product Drawing | As Below | | |

Product Drawing:

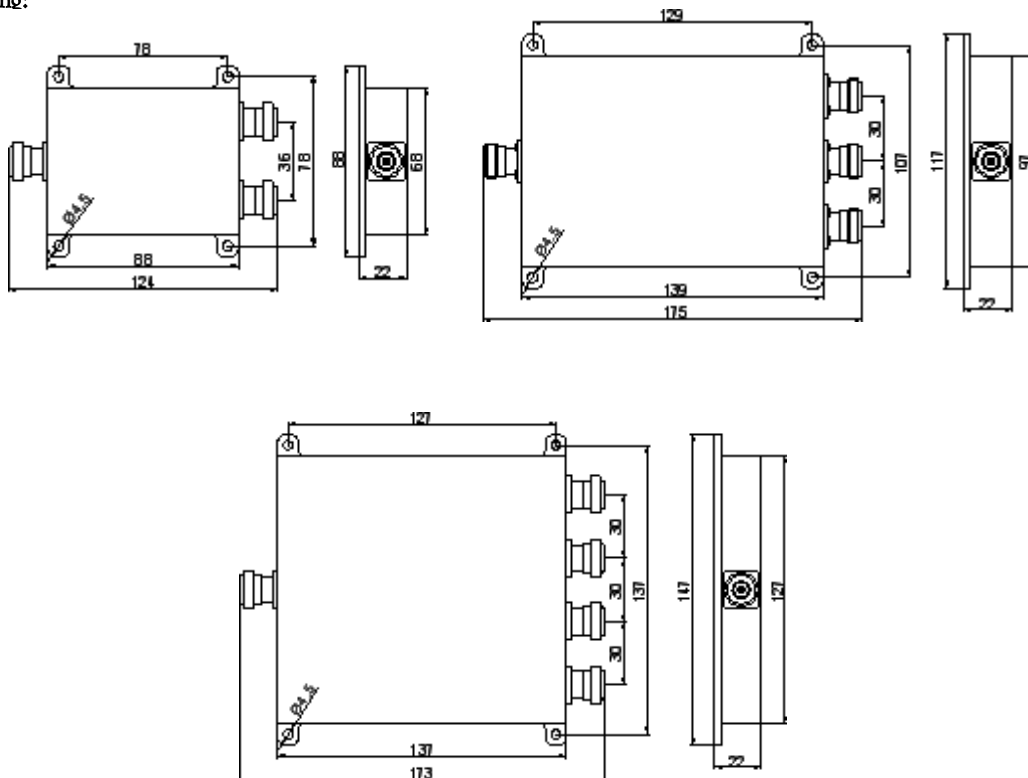

Note: The picture is only for reference, please make the object as the standard.

All specifications are subject to change without notice.

©2021 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <https://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw