

75 ohm F Type connector Fixed Attenuator (DC~3GHz,2W)



Tone Spread
Solutions for Wireless Signal


Telecommunication Technology & Engineering Accessories

Rev.V1.0

電器規格 (Electrical Specifications)

產品名稱 Name	Attenuator 衰減器									
工作頻率 Frequency Range (MHz)	DC-3000MHz									
衰減度 Attenuates Value (dB)	1	2	3	5	6	10	15	20	30	40
衰減精度 Attenuates Tolerance (dB)	±0.5	±0.5	±0.5	±0.5	±0.5	±1.0	±1.0	±1.0	±1.0	±1.2
回波損耗 Return Loss (dB)	≥18									
駐波比 VSWR (dB)	≤1.3									
互調 Intermodulation Products (dBm)	≤-120 dBc (with 2 x 43dBm) 或無互調									
功率容量 Maximum Input (W)	2 W									
工作溫度 Operating temperature (°C)	-40°C to +100°C									
相對濕度 Relative humidity (°C)	5%~ 95 %									
阻抗 Impedance (Ω)	75Ω									
尺寸 Size (mm)	50 x 20 x 18 mm									
重量 Weight (g)	18g									
接頭類型 Connector Type	F male 至 F Female									
防水等級 Ingress protection	IP65									
外觀顏色 Color	本色									

外型尺寸

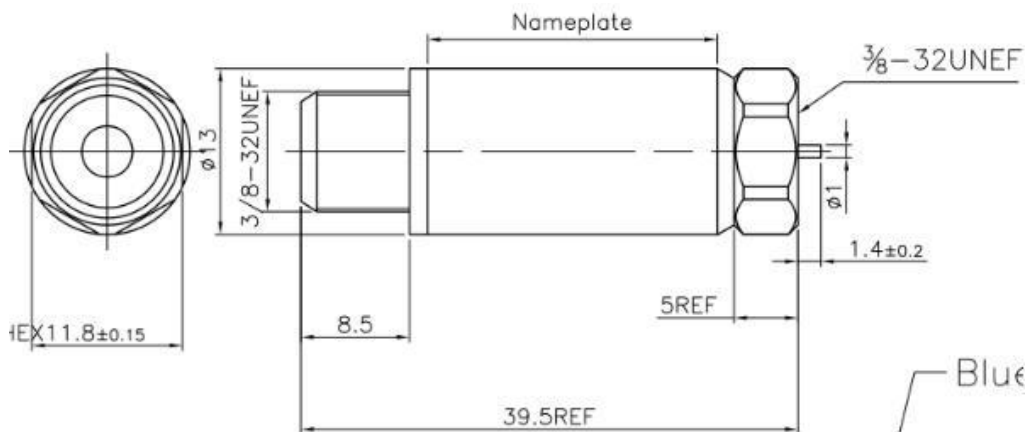

符合 RoHS 要求。