


## DC-560-200-XC43MDI

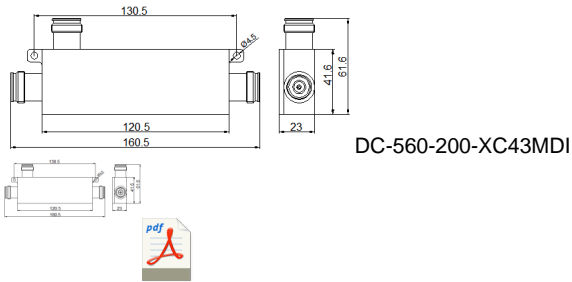

575-6000MHz 4.3/10 TYPE DIRECTIONAL COUPLER

??: ????  
7 Days

[?????????](#)

??

Item	Specification									
Model	DC-560-200-XC43MDI									
Frequency Range	575-6000 MHz									
Coupling (dB)	<table border="1"> <tr> <td>5±0.1</td> <td>6±0.1</td> <td>7±0.2</td> <td>8±0.2</td> <td>10±1.2</td> <td>13±1.3</td> <td>15±1.3</td> <td>20±1.4</td> <td>30±2.0</td> </tr> </table>	5±0.1	6±0.1	7±0.2	8±0.2	10±1.2	13±1.3	15±1.3	20±1.4	30±2.0
5±0.1	6±0.1	7±0.2	8±0.2	10±1.2	13±1.3	15±1.3	20±1.4	30±2.0		
Directivity (dB)	20									
	18									
Insertion loss	<table border="1"> <tr> <td>2.5</td> <td>1.9</td> <td>1.7</td> <td>1.2</td> <td>0.9</td> <td>0.6</td> <td>0.5</td> <td>0.3</td> <td>0.3</td> </tr> </table>	2.5	1.9	1.7	1.2	0.9	0.6	0.5	0.3	0.3
2.5	1.9	1.7	1.2	0.9	0.6	0.5	0.3	0.3		
VSWR	1.25 :1 (575-3800MHz) ; 1.30 :1 (3800-6000MHz)									
Intermodulation	-160 dBc@2x43dBm *									
Power Rating	200W									
Impedance	50(?)									
Connector	4.3-10/Female									
Temperature Range	-35 - +85(°C)									

Housing Finish Color	Black/Gray/ /White
Applications	Indoor/Outdoor Use , IP65 , RoHS Compliant