


DC-538-300-XCNI

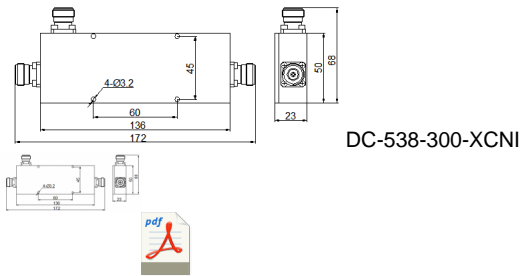

575-3800MHz N TYPE DIRECTIONAL COUPLER

??: ????
7 Days
★ ★

[??????????](#)

??

Item	Specification																		
Model	DC-538-300-XCNI																		
Frequency Range	575-3800MHz																		
Coupling (dB)	<table border="1"> <tr> <td>3±0.8</td> <td>5±1.0</td> <td>6±1.0</td> <td>8±1.0</td> <td>10±1.0</td> <td>13±1.0</td> <td>15±1.0</td> <td>20±1.0</td> <td>30±1.0</td> </tr> <tr> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> </table>	3±0.8	5±1.0	6±1.0	8±1.0	10±1.0	13±1.0	15±1.0	20±1.0	30±1.0	0	0	0	0	0	0	0	0	0
3±0.8	5±1.0	6±1.0	8±1.0	10±1.0	13±1.0	15±1.0	20±1.0	30±1.0											
0	0	0	0	0	0	0	0	0											
Insertion loss	<table border="1"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> </tr> </table>										dB	dB	dB	dB	dB	dB	dB	dB	dB
dB	dB	dB	dB	dB	dB	dB	dB	dB											
VSWR	1.25:1																		
Directivity	20dB@575-3600MHz / 18dB@3600-3800MHz																		
Intermodulation	-155dBc@2x43dBm *																		
Average Power	300 W																		
Impedance	50(?)																		
Connector	N/Female																		
Temperature Range	-35 - +85(°C)																		

575-3800MHz N TYPE DIRECTIONAL COUPLER

Housing Finish Color	Black / Gray / Gold / Frosted Matte Black
Applicat ions	Indoor/Outdoor Use , IP65 , RoHS Compliant