


## PS-560-300-XC43MDI

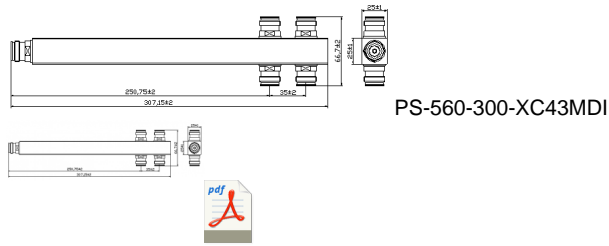

575-6000MHz 4.3/10 TYPE POWER SPLITTER

??: ????  
7 Days

[?????????](#)

??

| Item                   | Specification                          |                     |                     |
|------------------------|--|---------------------|---------------------|
| Model                  | PS-560-300-2C43MDI                     | PS-560-300-3C43MDI  | PS-727-560-4C43MDI  |
| Frequency Range (MHz)  | 575-6000                               |                     |                     |
| Split (dB)             | 2                                      | 3                   | 4                   |
| Split Loss (dB)        | 3                                      | 4.8                 | 6                   |
| VSWR                   | 1.20<br>(575-3800)                     | 1.25<br>(575-3800)  | 1.25<br>(575-3800)  |
|                        | 1.30<br>(3800-6000)                    | 1.30<br>(3800-6000) | 1.35<br>(3800-6000) |
| Insertion loss (dB)    | 0.2<br>(575-2700)                      | 0.4<br>(575-3800)   | 0.5<br>(575-3800)   |
|                        | 0.4<br>(2700-6000)                     | 0.7<br>(3800-6000)  | 0.8<br>(3800-6000)  |
|                        | -160dBc@2x43dBm *                      |                     |                     |
| (dBc)                  |  |                     |                     |
| Power Rating (W)       | 300                                    |                     |                     |
| Impedance (?)          | 50                                     |                     |                     |
| Connector              | N/Female                               |                     |                     |
| Temperature Range (°C) | -35 ~ 85                               |                     |                     |
| Applications           | Indoor/Outdoor , IP65 , RoHS Compliant |                     |                     |