


7/16(DIN)/M-41MD/M



7/16(DIN)/M-41MD/M

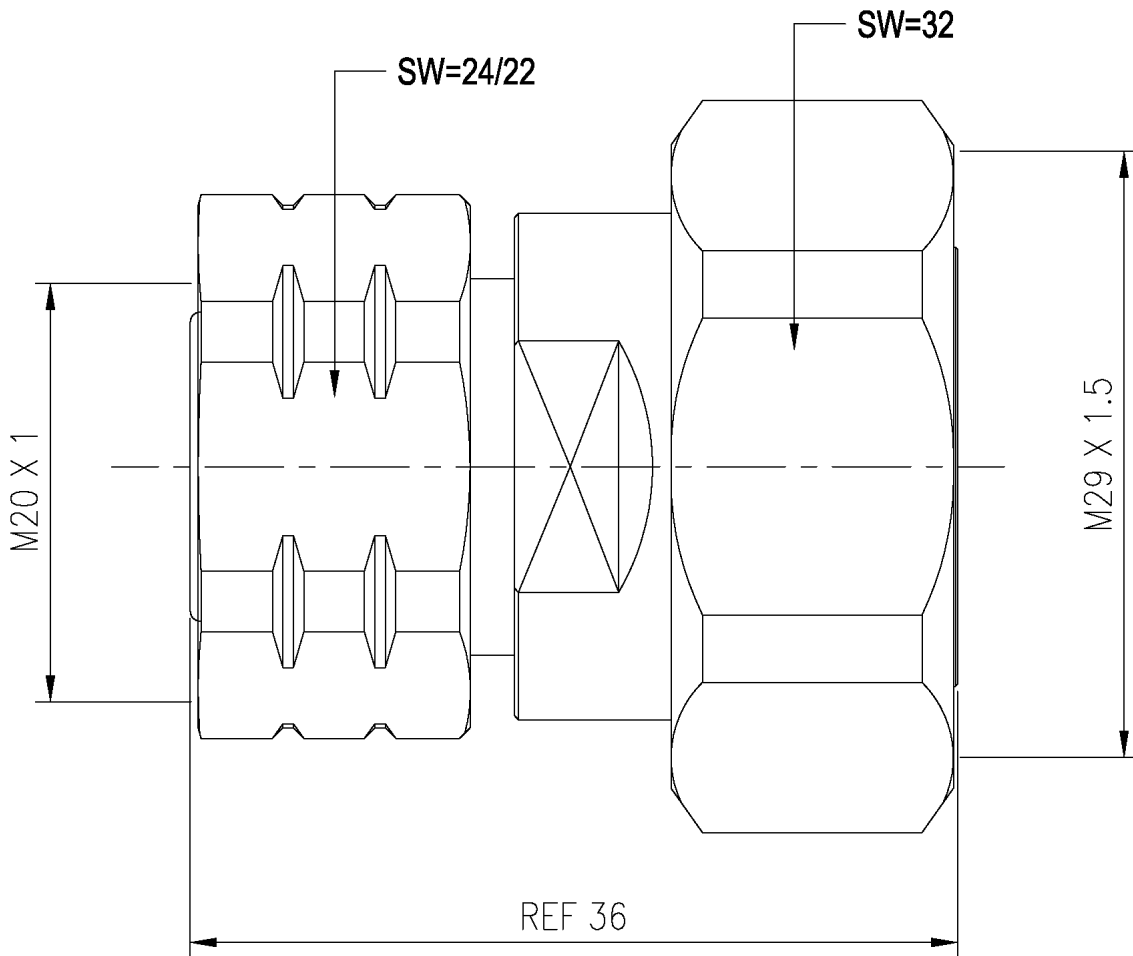

Low PIM 7/16(DIN) M to 4.1/9.5(MINI DIN) M RF Adapter

?: ????
7 Days

[????????](#)

??

Model		7/16(DIN)/M-41MD/M
Frequency Range		0~6GHz
Contact	Inner	?0.4 m?

Resistance	Conductor	
	Outer Conductor	?1.5 m?
Insulation Resistance		?5000 M?
Withstanding Voltage AC(V/min)		?3000V
VSWR		?1.08(0~3GHz) , ?1.20(0~6GHz)
PIM (2X43dBm)		<-165dBc (
Insertion Loss		?0.1dB
Impedance		50?
Durability		500 Cycles