


75 ohm F Type connector Fixed Attenuator

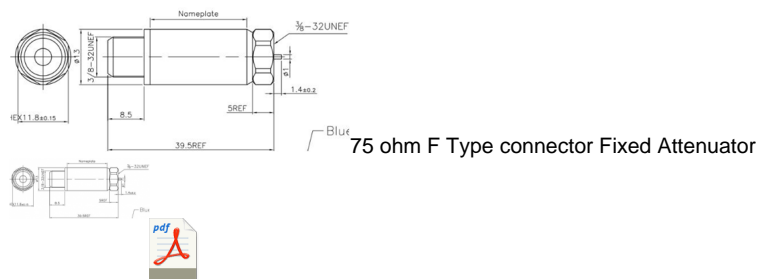

75 ohm F Type connector Fixed Attenuator (DC~3GHz,2W)

?? : ????
14 Days

??????????

??

產品名稱 Name	Attenuator 衰減器										
工作頻率 Frequency Range (MHz)	DC~3000MHz										
衰減度 Attenuates Value (dB)	1	2	3	5	6	10	15	20	30	40	
衰減精度 Attenuates Tolerance (dB)	±0.5	±0.5	±0.5	±0.5	±0.5	±1.0	±1.0	±1.0	±1.0	±1.2	
回波損耗 Return Loss (dB)	≥16										
駐波比 VSWR (dB)	≤1.3										
互調 Intermodulation Products(dBm)	≤-120 dBc (with 2 x 43dBm) 或無互調										
功率容量 Maximum Input (W)	2 W										
工作溫度 Operating temperature(°C)	-40°C to +100°C										
相對濕度 Relative humidity(°C)	5%~ 95 %										
阻抗 Impedance (Ω)	75Ω										
尺寸 Size (mm)	50 x 20 x 18 mm										
重量 Weight (g)	18g										
接頭類型 Connector Type	F male 及 F Female										
防水等級 Ingress protection	IP65										
外觀顏色 Color	本色										