


????????(HIGH POWER WIDEBAND DUPLEXER)

JTDW-DP-xxxx-DF

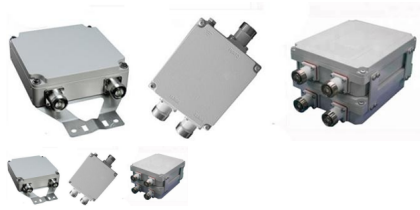

JTDW-DP-xxxx-DF

????????(HIGH POWER WIDEBAND DUPLEXER)

?: ????
1-4 Weeks
★★★★★

[????????](#)

??

Model Number	JTDW-DP-780-DF		JTDW-DP-3912-DF		JTDW-DP-1821-DF	
Freq(MHz)	698-862	880-860	380-960	1710-2170	1710-1880	1920-2170
Insertion Loss (dB)	≅0.5	≅0.5	≅0.3	≅0.3	≅0.3	≅0.3
Ripple in Band (dB)	≅0.4	≅0.4	≅0.25	≅0.25	≅0.25	≅0.25
Isolation (dB)	≅50	≅50	≅50	≅50	≅50	≅50
VSWR	≅1.3	≅1.3	≅1.25	≅1.25	≅1.25	≅1.25
Input Power (W)	300(average per port)		300(average per port)		300(average per port)	
Impedance (ohm)	50		50		50	
PIM3 (dBc@2*43dBm)	≅ -153 & ≅ -160					
Connector	N-female & DIN-female & 4.3/10-female					
Color	Gray-plated		Gray-plated		Gray-plated	
Application	Indoor & Outdoor IP67		Indoor & Outdoor IP67		Indoor & Outdoor IP67	
Working Temperature(°C)	-25~+60		-25~+60		-25~+60	
Mounting	Pole or Wall Mount		Pole or Wall Mount		Pole or Wall Mount	
Humidity	5-95%		5-95%		5-95%	