


MOPA-698-4000S-9-65A-OD-NV3

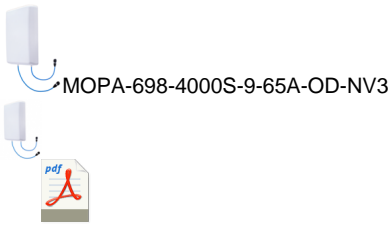

698-4000MHz Low PIM Outdoor MIMO Panel Antenna

?: ????
7 Days
★ ★ ★ ★

[????????](#)

??

Electrical Specifications	
Frequency	6917.33
Bandwidth	8-10.00
Frequency Range, MHz	96.0-104.0
Gain, dBi	5.8-5.7
VSWR	1.2-1.2
Return Loss, dB	10.8-10
Polarization	H+V
Isolation, dB	20-24
Front-to-back Ratio, dB	17-13

Back Ratio, dB			
PIM, 3rd Order, 20W	?-153 dBc		
Horizontal Beamwidth	90°	65°	
Vertical Beamwidth	78°	60°	38°
Input Impedance	50 Ω		
Max. Input Power	50 W		
Lightning Protection	DC Ground		