


TS050202030101NF

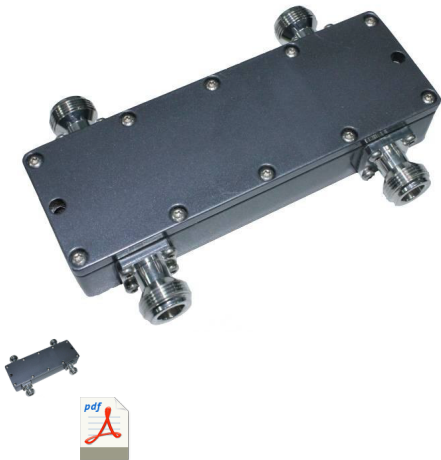

TS050202030101NF

3dB?????(3dB Hybrid Combiner)

??: ????
On Order
★★★★★

[?????????](#)

??

Frequency	88-108MHz
Distribution loss	?3.0dB
Insertion loss	?0.45dB
Ripple	?0.5dB
VSWR	?1.22
Isolation	?23dB
Inter-modulation (3rd order)	?-140dBc@2x43dBm
Impedance	50?
Power handling	200W
Operating temperature range	-10°C to +65°C
Storage temperature range	-40°C to +80°C
Relative humidity	5% - 95%
Applications	Indoor or Outdoor(IP66)
Connectors type	N-F
Dimensions	161*78*24mm
Weight (kg)	1kg
Packing	1 Pce in box