


PA-698-4000-7-65A-ID-NV3

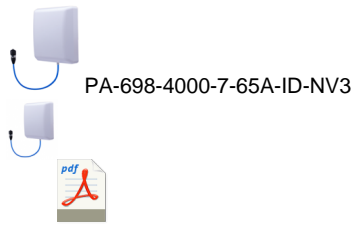

698-4000MHz Low PIM Indoor Panel Antenna

?: ????
7 Days
★ ★ ★ ★

[????????](#)

??

Electrical Specifications	
Frequency	681733
Bandwidth	901000
Return Loss	8-6--2-4
Impedance	897000
Efficiency	0600
Power	MHz60
Gain	5.6.8.7.
Gain, dBi	5500
VSWR	? ?
WR	1.1. 8 8
	2.2. 0 0
Polarization	Vertical
PIM, 3rd	?-153 dBc

Order, 2x20W	
Front to Back Ratio, dB	91510
Horizontal Beamwidth	186550 05°° 0°
Vertical Beamwidth	986045 02°° °°
Input Impedance	50 ?
Max. Input Power	50 W
Lightning Protection	DC Ground