


TSDC20-18-40G-2F

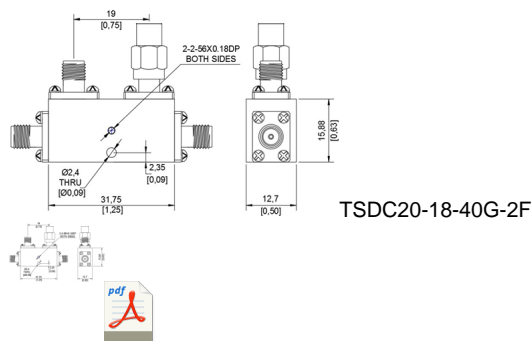

18-40 GHz ?????(Directional Coupler)

?: ????
1-4 Weeks
★ ★ ★ ★ ★

[??????????](#)

??

No.	Parameter	Minimum	Typical	Maximum	Units
1	Frequency range	18	-	40	GHz
2	Nominal Coupling		20		dB
3	Coupling Accuracy	-	-	±1.0	dB
4	Coupling Sensitivity to Frequency	-	-	±0.6	dB
5	Insertion Loss	-	-	1.2	dB
6	Directivity	10			dB
7	VSWR	-		1.60	-
8	Power			20	W cw
9	Operating Temperature Range	-40	-	+85	?C
10	Impedance	-	50	-	?

11	Preferred finish	/
-----------	-----------------------------	---