


## JTDW-xWPS-1396-NF

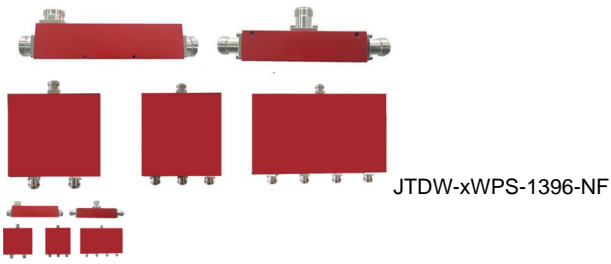

????????(LOW BAND COMPONENTS FOR PUBLIC SAFETY)

?: ????  
1-4 Weeks  
★ ★ ★ ★

[????????](#)

??

Model Number	JTDW-2WPS-1396-NF	JTDW-3WPS-1396-NF	JTDW-4WPS-1396-NF
Frequency Band(MHz)	138-960		
Split Loss(dB)	3.0	4.8	6.0
Insertion Loss(dB)	≈ 2.0	≈ 1.8	≈ 1.6
Isolation(dB)	≈ 18	≈ 16	≈ 14
VSWR	≈ 1.35		
Power Rating(W)	100(average per port)		
RF Connector	N female		
Working Temperature(°C)	-35 ~ +65		
Application	Indoor IP60		
Color	Red-plated		